

Have you checked e-Bailey?

Lival Trigger Mini 35W/930 50D WFL Silver

Bailey nr.: 142136




Lival LED Tracklight Trigger Mini 35W/930 3000K 50D WFL Silver Spot 3-phase adapter

Versatile thanks to the sleek housing in combination with the cylindrical shape. Supplied with universal 3-phase adapter and driver. Made of powder-coated die-cast aluminum. Equipped with modern Citizen LED technology, high color stability MacAdams 2SDCM.

| General properties | |
|---|-------------------------|
| EAN-code | 8714681421369 |
| Product series | Lival LED Tracklight |
| Product Type | Trigger Mini |
| Specifications | |
| Adjustability | Rotating and swivelling |
| With movement sensor | No |
| With light sensor | No |
| With light source | Yes |
| Lamp holder | None |
| Material housing | Aluminium |
| Surface protection | Powder coating |
| Colour housing | Silver |
| Material cover | Plastic, transparent |
| Nominal voltage (V) | 220 240 V |
| Voltage type | AC |
| LED nominal current at constant current | 900 900 mA |
| Dimmable | No |
| Light sharing | Symmetric |
| Beamangle | Wide beam 41-80° |
| Rated life time L70/B10 at 25 °C | |
| Rated life time L70/B50 at 25 °C | |
| Rated life time L80/B10 at 25 °C | 50000 h |
| Rated life time L80/B50 at 25 °C | |
| Rated life time L90/B10 at 25 °C | |
| Rated life time L90/B50 at 25 °C | |
| Degree of protection (IP) | IP20 |
| Impact strength | IK02 |
| Protection class | II |
| Rated ambient temperature | |
| Max. system power (W) | 35 W |
| Colour of light | White |
| Colour temperature (K) | 3000 3000 K |
| Colour rendering index CRI | 90-100 |

| 2950 2950 lm |
|--------------|
| |
| 84 lm/W |
| |
| 100 mm |
| 104 mm |
| 194 mm |
| |
| |
| |
| |

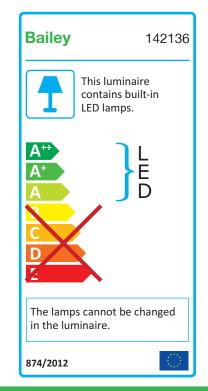

Bailey Lights | Everdenberg 21 | 4902 TT Oosterhout | The Netherlands | sales@bailey.nl | +31 (0) 162 52 24 456 | www.bailey.nl